



## CAST Solid Bronze Wall Wash Light (CWW1CB),(CWW1LED2) Product Information

### CAST Solid Bronze Wall Wash Light - For Wide Beam Applications



Converts with CSWLED2 Module (sold separately)

#### Description:

This rugged solid bronze wall wash features a convex borosilicate lens. The CWW1CB can be converted to integrated LED using the CSWLED2 module

The LED Wall Wash (CWW1LED2) features an integrated, replaceable LED module

#### Features:

- ▶ Solid bronze shroud and body
- ▶ Solid bronze stake
- ▶ Pre-wired with 25' tin-coated No-Ox® marine grade wire
- ▶ High-temp socket with solid nickel contacts
- ▶ Spider Splice® ready

#### Uses:

Suitable for illuminating walls and other broad area applications

#### Construction:

Solid bronze shroud, body and stake; heavy-gauge copper stem; ceramic socket with solid nickel contacts; 25' tin-coated #16-2 No-Ox® marine-grade wire; silicone rubber gasket; borosilicate convex lens.

#### Dimensions:

Shroud, base and stem: 7" tall x 4.25" wide.

#### Specifications:


CWW1CB Lamp: Includes 2.5 W, 9-20 volt operating range, S8 LED Lamp (SL3156250L).

Halogen Option: 12V, 25W, S8 wedge-based - 35W max. (C3156K).

CWW1LED2: 2 Cree LED's, L70 Life 60,500 hrs. Color Temp: 2758°K, CRI: 82 Input Voltage: 10 to 24V, AC or DC, Power Factor: .9, Volt Amps: 4.81, Fixture Lumens: 147.6, .4 Amps, 4.33 Watts

#### Listing:

U.L 1838 Listed Low Voltage Luminaire for wet locations

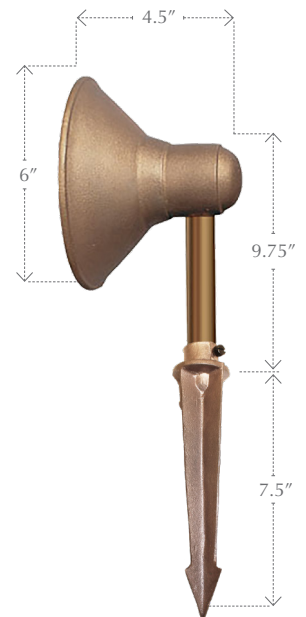

CWW1CB, CWW1LED2